
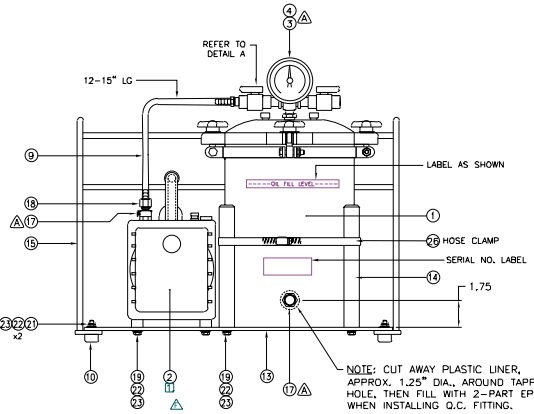
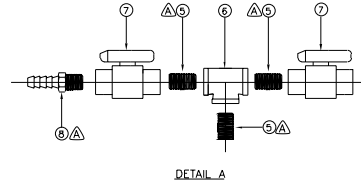


REFERENCE MODEL (1344)


IN APP	IN WATER - FRESH / SALT
6D*	n/a / n/a

* Includes Oil (1 gal) and All Hardware

REV	DESCRIPTION	DATE	APPROV
D	ADDED ITEM NO. 25 TO P/L	9/10/02	
E	ADDED ITEM NO. 26 TO P/L	4/26/05	
F	ADDED ITEMS 27,28,29 AND 30 TO P/L ADDED NOTE NO. 1 AND CHANGED ITEM NO. 5 TO 8	5/26/05	

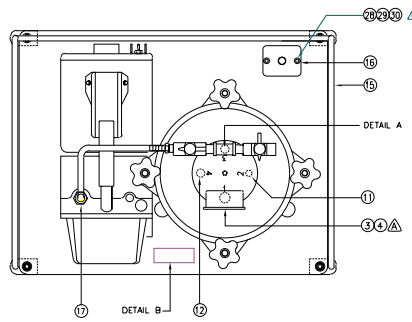

NOTE: CUT AWAY PLASTIC LINER, APPROX. 1.25" DIA., AROUND TAPPED HOLE, THEN FILL WITH 2-PART EPOXY WHEN INSTALLING O.C. FITTING.



NOTES:

- 1 FOR 110V OPERATION REPLACE LINE CORD AND REWIRE.
- USE LOCTITE 545 HYDRAULIC/ PNEUMATIC THREAD SEALANT, COVER ALL THREADS.

ITEM NO.	DESCRIPTION	QTY	UNIT	REMARKS
20	NUT TO HARDWARE	1	M-ORING-12	NUT TO SPLIT LOCK WASHER
21	NUT TO HARDWARE	1	M-ORING-12	NUT TO SPLIT LOCK WASHER
22	HOSE CLAMP	1	M-ORING-12	HOSE CLAMP FOR HOSE LINE
23	HOSE CLAMP	1	M-ORING-12	HOSE CLAMP FOR HOSE LINE
24	HOSE CLAMP	1	M-ORING-12	HOSE CLAMP FOR HOSE LINE
25	HOSE CLAMP	1	M-ORING-12	HOSE CLAMP FOR HOSE LINE
26	HOSE CLAMP	1	M-ORING-12	HOSE CLAMP FOR HOSE LINE
27	HOSE CLAMP	1	M-ORING-12	HOSE CLAMP FOR HOSE LINE
28	HOSE CLAMP	1	M-ORING-12	HOSE CLAMP FOR HOSE LINE
29	HOSE CLAMP	1	M-ORING-12	HOSE CLAMP FOR HOSE LINE
30	HOSE CLAMP	1	M-ORING-12	HOSE CLAMP FOR HOSE LINE

REV	DATE	BY	DESCRIPTION
1	09/10/02
2	04/26/05
3	05/26/05

D

C

B

A

D

C

B

A

8

7

6

5

4

3

2

1

8

7

6

5

4

3

2

1